

Enabler Release Definition for Data Synchronization

Approved Version 1.2 – 10 Jul 2006

Open Mobile Alliance OMA-ERELD-DS-V1_2-20060710-A Use of this document is subject to all of the terms and conditions of the Use Agreement located at <u>http://www.openmobilealliance.org/UseAgreement.html</u>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile AllianceTM specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the "OMA IPR Declarations" list at http://www.openmobilealliance.org/ipr.html. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE "OMA IPR DECLARATIONS" LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2006 Open Mobile Alliance Ltd. All Rights Reserved. Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

Contents

1.		OPE	
2.	RE	FERENCES	
	2.1	NORMATIVE REFERENCES	6
	2.2	INFORMATIVE REFERENCES	
3.	ТЕ	RMINOLOGY AND CONVENTIONS	
	3.1	CONVENTIONS	7
	3.2	DEFINITIONS	7
	3.3	ABBREVIATIONS	7
4.	IN	FRODUCTION	8
5.	DE	SCRIPTION OF DIFFERENCIES FROM PREVIOUS VERSION	9
6.	DO	CUMENT LISTING FOR DS 1.2	10
7.	MI	NIMUM FUNCTIONALITY DESCRIPTION FOR DS	
	7.1	MINIMUM FUNCTIONALITY OF DS CLIENT IMPLEMENTATIONS	11
	7.2	MINIMUM FUNCTIONALITY OF DS SERVER IMPLEMENTATIONS	11
8.	CO	ONFORMANCE REQUIREMENTS NOTATION DETAILS	12
9.	ER	DEF FOR DS - CLIENT REQUIREMENTS	13
10	I	ERDEF FOR DS - SERVER REQUIREMENTS	14
Ał	PEN	DIX A. CHANGE HISTORY (INFORMATIVE)	15
	A.1 A	PPROVED VERSION HISTORY	15

Figures

Figure 1 OMA SyncML Specification Structure and Relationships	Figure	1 OMA SyncML	Specification S	tructure and Relationships	
---	--------	--------------	-----------------	----------------------------	--

Tables

Table 1 Listing of Documents in DS 1.2 Enabler	10
Table 2 ERDEF for DS Client-side Requirements	13
Table 3 ERDEF for DS Server-side Requirements	14

1. Scope

The SyncML Initiative, Ltd. was a not-for-profit corporation formed by a group of companies who co-operated to produce an open specification for data synchronization and device management. Prior to SyncML, data synchronization and device management had been based on a set of different, proprietary protocols, each functioning only with a very limited number of devices, systems and data types. These non-interoperable technologies have complicated the tasks of users, manufacturers, service providers, and developers. Further, a proliferation of different, proprietary data synchronization and device management protocols has placed barriers to the extended use of mobile devices, has restricted data access and delivery and limited the mobility of the users.

The SyncML Initiative merged with the Open Mobile Alliance in November 2002. The SyncML legacy specifications were converted to the OMA format with the 1.1.2 versions of OMA SyncML Common, OMA Data Synchronization and OMA Device Management in May 2002. The relationship between these documents which had been created during the SyncML Initiative has been preserved and is depicted in Figure 1 OMA SyncML Specification Structure and Relationships.

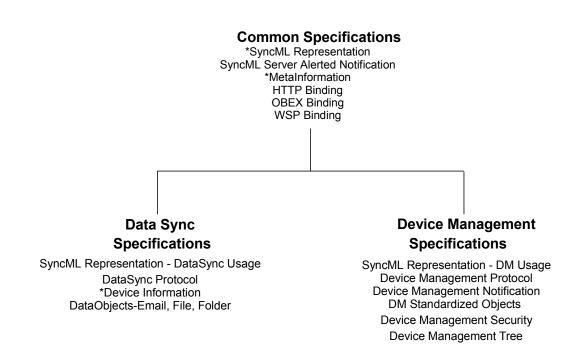


Figure 1 OMA SyncML Specification Structure and Relationships

The OMA SyncML Common Specifications Enabler Release includes the following documents:

- SyncML Representation: The XML-based representation protocol which specifies the common XML syntax and semantics used by all SyncML protocols. This defines the superset of the DS and DM representation protocols. (* includes DTD).
- The transport bindings: HTTP, OBEX, WSP. These specify the features of each transport required by DS and DM protocol messages.
- The Meta Information associated with a SyncML command or data item or collection used by either DS or DM (* includes DTD)
- SyncML Server Alerted Notification: The logical structure and format of the notification messages used by all SyncML server alerted notifications, for both DS and DM.

The OMA Data Synchronization Specifications Enabler Release includes the following documents:

- SyncML Representation DataSync Usage: The subset of the Common Specifications SyncML Representation Specification necessary to define the Data Synchronization commands and protocol, with examples and commentary specific to DS.
- DataSyncProtocol: Specifies how SyncML Common messages conforming to the DTD are exchanged in order to allow an OMA DS client and server to exchange additions, deletions, updates and other status information.
- Device Information: Used to exchange device specific information, including hardware, firmware, software levels, available memory, and local databases supported. (* Includes DTD)
- Data Objects: Email, File, Folder: Each object is identified by a unique MIME media type (eg. **application/vnd.omads-email)**. The objects are either represented by or encapsulated in a mark-up language defined by xml. Meta or state data is included in the representation (eg. Read/Unread, Creation Date, Last Modified Date).

Although the SyncML Common specification defines transport bindings that specify how to use a particular transport to exchange messages and responses, the SyncML Common representation, synchronization and device management protocols are transport-independent. Each package in these protocols is completely self-contained, and could in principle be carried by any transport. The initial bindings specified are HTTP, WSP and OBEX, but there is no reason why SyncML Common could not be implemented using email or message queues, to list only two alternatives. Because the SyncML Common messages are self-contained, multiple transports may be used without either the server or client devices having to be aware of the network topology. Thus, a short-range OBEX connection could be used for local connectivity, with the messages being passed on via HTTP to an Internet-hosted synchronization server.

To reduce the data size, a binary coding of SyncML Common based on the WAP Forum's WBXML is defined. Messages may also be passed in clear text if required. In this and other ways SyncML Common addresses the bandwidth and resource limitations imposed by mobile devices.

SyncML Common is both data type and data store independent. SyncML Common can carry any data type which can be represented as a MIME object. To promote interoperability between different implementations of OMA Data Synchronization, the specification includes the representation formats used for common PIM data.

The OMA SyncML Data Synchronization v1.2 Enabler Release continues the effort to promote a single, common data synchronization protocol.

2. References

2.1 Normative References

[DSREPU]	"SyncML Representation Protocol, Data Synchronization Usage", Open Mobile Alliance™, OMA-TS-DS_DataSyncRep-V1_2, <u>URL:http://www.openmobilealliance</u> .org
[ELREDSC]	"Enabler Release Definition for SyncML Common Specifications", Open Mobile Alliance™, OMA-ERELD-SyncML-Common-V1_2, <u>URL:http://www.openmobilealliance.org</u>
[EMAILOBJ]	"Email Data Object Specification", Open Mobile Alliance™, OMA-TS-DS-DataObjEmail-V1_2, <u>URL:http://www.openmobilealliance.org</u>
[FILEOBJ]	"File Data Object Specification", Open Mobile Alliance™, OMA-TS-DS-DataObjFile-V1_2, <u>URL:http://www.openmobilealliance.org</u>
[FOLDEROBJ]	"Folder Data Object Specification", Open Mobile Alliance™, OMA-TS-DS-DataObjFolder- V1_2, <u>URL:http:www.openmobilealliance.org</u>
[IOPPROC]	"OMA Interoperability Policy and Process", Open Mobile Alliance™, OMA-IOP-Process-V1_3, <u>URL:http//www.openmobilealliance.org</u>
[RFC2119]	"Key words for use in RFCs to Indicate Requirement Levels", S. Bradner, March 1997, URL:http://www.ietf.org/rfc/rfc2119.txt
[DSPRO]	"DS Protocol", Open Mobile Alliance™, OMA-TS-DS_Protocol-V1_2, <u>URL:http:www.openmobilealliance.org</u>
[DSDEV]	"OMA DS Device Information", Open Mobile Alliance™, OMA-TS-DS-DevInf-V1_2, <u>URL:http://www.openmobilealliance.org</u>
[DSDEVDTD]	"OMA DS Device Information Document Type Definition", Open Mobile Alliance™, OMA- SUP-DS-DevInf-DTD-V1_2, <u>URL:http:www.openmobilealliance.org</u>
[W5APPCHAR]	"W5 Application Characteristics", Open Mobile Alliance™, OMA-SUP-DS-W5AppChar-V1_2, <u>URL:http:www.openmobilealliance.org</u>

2.2 Informative References

[CHANGEHIST] "OMA DS Standards Change History", Open Mobile Alliance™, OMA-WP-SyncML_ChangeHistory, <u>URL:http://www.openmobilealliance</u>.org

3. Terminology and Conventions

3.1 Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except "Scope" and "Introduction", are normative, unless they are explicitly indicated to be informative.

The formal notation convention used in sections 9 and 10 to formally express the structure and internal dependencies between specifications in the Enabler Release specification baseline is detailed in [IOPPROC].

3.2 Definitions

Data synchronization	The act of establishing an equivalence between two data collections, where each data element in one item maps to a data item in the other, and their data is equivalent.
Enabler Release	A collection of specifications that combined together form an enabler for a service area, e.g. a download enabler, a browsing enabler, a messaging enabler, a location enabler, etc. The specifications that are forming an enabler should combined fulfill a number of related market requirements.
Minimum Functionality Description	Description of the guaranteed features and functionality that will be enabled by implementing the minimum mandatory part of the Enabler Release.

3.3 Abbreviations

DS	Data Synchronization
DTD	Document Type Definition
ERDEF	Enabler Requirement Definition
ERELD	Enabler Release Definition
OMA	Open Mobile Alliance
SCR	Static Conformance Requirements
SyncML	Synchronization Mark-up Language
XML	Extensible Mark-up Language

4. Introduction

This document outlines the Enabler Release Definition for DS and the respective conformance requirements for client and server implementations claiming compliance to the Open Mobile Alliance DS v1.2 specifications.

It should be understood that the OMA SyncML Common v1.2 specifications must be used in conjunction with the OMA Data Synchronization Enabler Release, version 1.2. Fully conformant DS client and DS server implementations can only be achieved through combining the conformance requirements outlined within this enabler release definition with those outlined within the SyncML Common Specifications [ELREDSC] enabler release definition.

The DS release provides for the definition and promotes a set of universal specifications for data synchronization.

The goal of a common synchronization protocol is symmetric. It would connect any to any, over any network. That is, it would:

- Synchronize networked data with any mobile device
- Synchronize a mobile device with any networked data

The data synchronization protocol would synchronize networked data with many different devices, including handheld computers, mobile phones, automotive computers, and desktop PCs. A user could access and manipulate the same set of data from different devices. For example, a user could read e-mail from either a handheld or a mobile phone, and still maintain a consistent, updated record of which messages had been read.

Similarly, with any-to-any synchronization, mobile devices could support more types of data, including e-mail, calendar, contact management information, enterprise data stored in databases, and documents on the web. With such functionality a user who received an order via e-mail could access the company inventory system on the same device to determine a delivery date.

To accomplish this goal, the protocol needs the following characteristics:

- Operate effectively over wireless and wire line networks
- Support a variety of transport protocols
- Support arbitrary networked data
- Enable data access from a variety of applications
- Address the resource limitations of the mobile device
- Build upon existing Internet and Web technologies
- The protocol's minimal function needs to deliver the most commonly required synchronization capability across the entire range of devices.

The OMA Data Synchronization release provides for the definition of a set of universal specifications for data synchronization. They are based on the OMA Data Synchronization v1.1.2 specifications. Any changes are restricted to previous requirements and change requests identified in the SyncML Initiative, Ltd.

5. Description of Differencies from Previous Version

Information regarding differences between OMA DS v1.2 and v1.1.2 and can be found in the informative DS Change History White Paper [CHANGEHIST].

6. Document listing for DS 1.2

This section is normative.

Doc Ref	Permanent Document Reference	Description			
Requirement Document					
	Not applicable				
Architecture Doc	ument				
	Not applicable				
Technical Specifi	cations				
[EMAILOBJ]	OMA-TS-DS_DataObjEmail-V1_2-20060710-A	Specification that defines the email data object. The content- specific aspects of synchronization (filtering keywords, etc) are listed and clarified.			
[FILEOBJ]	OMA-TS-DS_DataObjFile-V1_2-20060710-A	Specification that defines the file data object. The content- specific aspects of synchronization (filtering keywords, etc) are listed and clarified.			
[FOLDEROBJ]	OMA-TS-DS_DataObjFolder-V1_2-20060710-A	Specification that defines the folder data object. The content- specific aspects of synchronization (filtering keywords, etc) are listed and clarified.			
[DSREPU]	OMA-TS-DS_DataSyncRep-V1_2-20060710-A	Specification that defines the subset of the Common Specifications SyncML Representation Specification necessary to define the Data Synchronization commands and protocol, with examples and commentary specific to DS.			
[DSDEV]	OMA-TS-DS_DevInf-V1_2-20060710-A	Specification that defines exchange of device specific information, including hardware, firmware, software levels, available memory and local databases supported.			
[DSPRO]]	OMA-TS-DS_Protocol-V1_2-20060710-A	Specification that defines how SyncML Common messages conforming to the DTD are exchanged in order to allow an OMA DS client and server to exchange additions, deletions, updates and other status information.			
Supporting Files					
[W5APPCHAR]	OMA-SUP-DS-W5AppChar-V1_2-20060710-A	Application characteristics.			
		Working file in AC directory: file: ac_w5_ds-v1_2.txt path: http://www.openmobilealliance.org/tech/omna/dm-ac/			
[DSDEVDTD]	OMA-SUP-DS-DevInf-DTD-V1_2-20060710-A	DTD for the OMA DS Device Information.			
		Working file in DTD directory: file: DS_DevInf-V1_2.dtd path: http://www.openmobilealliance.org/tech/dtd/			

Table 1 Listing of Documents in DS 1.2 Enabler

7. Minimum Functionality Description for DS

This section is informative.

7.1 Minimum Functionality of DS Client Implementations

This section is informative.

The list of minimum functionality for a DS client is very numerous. Please refer to the Enabler Release specification baseline listed in section 6.

7.2 Minimum Functionality of DS Server Implementations

This section is informative.

The list of minimum functionality for a DS server is very numerous. Please refer to the Enabler Release specification baseline listed in section 6.

8. Conformance Requirements Notation Details

This section is informative

The tables in following chapters use the following notation:

Item:

Entry in this column MUST be a valid ScrItem according to [IOPPROC].

Feature/Application:

Entry in this column SHOULD be a short descriptive label to the Item in question.

Status:

Entry in this column MUST accurately reflect the architectural status of the Item in question.

- M means the Item is mandatory for the class
- O means the Item is optional for the class
- NA means the **Item** is not applicable for the class

Requirement:

Expression in the column MUST be a valid TerminalExpression according to [IOPPROC] and it MUST accurately reflect the architectural requirement of the **Item** in question.

9. ERDEF for DS - Client Requirements

This section is normative.

Table 2 ERDEF for DS Client-side Requirements

Item	Feature / Application	Status	Requirement
OMA-ERDEF-DS-C-001	DS Client	M*	[DSREPU] AND [DSPRO] AND [DSDEV]

^{*}It should be understood that the OMA SyncML Common v1.2 specifications must be used in conjunction with the OMA Data Synchronization Enabler Release, version 1.2. Fully conformant DS client implementations can only be achieved through combining the conformance requirements outlined above with those outlined within the SyncML Common Specifications enabler release definition [ELREDSC].

10.ERDEF for DS - Server Requirements

This section is normative.

Item	Feature / Application	Status	Requirement
OMA-ERDEF-DS-S-001	DS Server	M*	[DSREPU] AND [DSPRO] AND [DSDEV]

^{*}It should be understood that the OMA SyncML Common v1.2 specifications must be used in conjunction with the OMA Data Synchronization Enabler Release, version 1.2. Fully conformant DS server implementations can only be achieved through combining the conformance requirements outlined above with those outlined within the SyncML Common Specifications enabler release definition [ELREDSC].

Appendix A. Change History

(Informative)

A.1 Approved Version History

Reference	Date	Description
OMA-ERELD-SyncML-DS-1.1.2-20030612-A	12 Jun 2003	Approved by TP. TP ref# OMA-TP-2003-0264R1
OMA-ERELD-DS-V1_2-20060710-A	10 Jul 2006	Approved by TP : TP ref# OMA-TP-2006-0239R03- INP_DS_V1_2_for_final_approval