



Game Service API Architecture

Candidate Version – 24 Apr 2012

Open Mobile Alliance
OMA-AD-GSAPI-V1_0-20120424-C

Use of this document is subject to all of the terms and conditions of the Use Agreement located at <http://www.openmobilealliance.org/UseAgreement.html>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile Alliance™ specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the “OMA IPR Declarations” list at <http://www.openmobilealliance.org/ipr.html>. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE “OMA IPR DECLARATIONS” LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2012 Open Mobile Alliance Ltd. All Rights Reserved.

Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

Contents

1. SCOPE (INFORMATIVE)	4
2. REFERENCES	5
2.1 NORMATIVE REFERENCES	5
2.2 INFORMATIVE REFERENCES	5
3. TERMINOLOGY AND CONVENTIONS	8
3.1 CONVENTIONS	8
3.2 DEFINITIONS	8
3.3 ABBREVIATIONS	8
4. INTRODUCTION (INFORMATIVE)	10
4.1 VERSION 1.0	10
5. ARCHITECTURAL MODEL	11
5.1 DEPENDENCIES	11
5.2 ARCHITECTURAL DIAGRAM	11
5.2.1 Architecture principle	11
5.3 FUNCTIONAL COMPONENTS AND INTERFACES DEFINITION	11
5.3.1 Functional Components	11
5.3.2 Functional Interfaces	12
5.4 SECURITY CONSIDERATIONS	13
5.5 CHARGING CONSIDERATIONS	14
APPENDIX A. CHANGE HISTORY (INFORMATIVE)	15
A.1 APPROVED VERSION HISTORY	15
A.2 DRAFT/CANDIDATE VERSION 1.0 HISTORY	15
APPENDIX B. FLOWS (INFORMATIVE)	16
B.1 BASIC WORK FLOW GSAPI-1	16
B.2 BASIC WORK FLOW GSAPI-2	17
B.3 BASIC WORK FLOW GSAPI-3	18
B.4 BASIC WORK FLOW GSAPI-4	19

Figures

Figure 1 Main Architecture of GSAPI 1.0	11
Figure 2: GSAPI-1 Work flow	16
Figure 3: GSAPI-2 Work flow	17
Figure 4: GSAPI-3 Work flow	18
Figure 6: GSAPI-4 Work flow	19

1. Scope

(Informative)

The scope of the GSAPI (Game Service API) architecture document is to define the architecture for the GSAPI Enabler. This document provides the functional capabilities needed to support the Enabler as described in GSAPI requirements document [GSAPI-RD].

2. References

2.1 Normative References

- [GP1.0] “Gaming Platform”, Version 1.0, Open Mobile Alliance™, OMA-GamingPlatform-V1_0, URL:<http://www.openmobilealliance.org/>
- [GSAD] “Game Services Architecture”, Version 1.0, Open Mobile Alliance™, OMA-Gaming Architecture-Overview-V1_0, URL:<http://www.openmobilealliance.org/>
- [HTTP] “Hypertext Transfer Protocol”, IETF, RFC 2616, URL:<http://www.ietf.org>
- [IOPPROC] “OMA Interoperability Policy and Process”, Version 1.3, Open Mobile Alliance™, OMA-IOP-Process-V1_3, URL:<http://www.openmobilealliance.org/>
- [RFC2119] “Key words for use in RFCs to Indicate Requirement Levels”, S. Bradner, March 1997, URL:<http://www.ietf.org/rfc/rfc2119.txt>
- [RFC2234] “Augmented BNF for Syntax Specifications: ABNF”. D. Crocker, Ed., P. Overell. November 1997, URL:<http://www.ietf.org/rfc/rfc2234.txt>
- [SMS] “The technical Realization of SMS”. 3GPP TS 23.040-v.5.3.0, URL:<http://www.3gpp.org>
- [SOAP] “Simple Object Access Protocol”, Version 1.1, W3C, URL:<http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>
- [TCP] “Transmission Control Protocol – DARPA Internet Program Protocol Specification”, IETF, RFC 793, URL:<http://www.ietf.org>
- [UAPROF] <http://www.openmobilealliance.org/tech/profiles/index.html>
- [UDP] “User Datagram Protocol”, IETF, RFC 768, URL:<http://www.ietf.org>
- [WSDL] “Web Services Description Language(WSDL)”, Version 1.1, W3C, URL:<http://www.w3.org/TR/wsdl>
- [XML] “eXensible Markup Language”, W3C, URL:<http://www.w3.org/XML/>

2.2 Informative References

- [OMADICT] “Dictionary for OMA Specifications”, Version 2.8, Open Mobile Alliance™, OMA-ORG-Dictionary-V2_8, URL: <http://www.openmobilealliance.org/>
- [WP-MSN] “White Paper on Mobile Social Network Work Item Investigation”, 26 April 2011, Open Mobile Alliance™, URL: <http://www.openmobilealliance.org/>
- [ACTIVITYSTREAMS] URL: <http://activitystrea.ms/>
- [ATOM] “The Atom Syndication Format”, M. Nottingham et al, December 2005
URL: <http://www.ietf.org/rfc/rfc4287.txt>
- [ATOMPUB] <http://www.ietf.org/rfc/rfc5023.txt>
- [CMIS] Content Management Interoperability Services (CMIS) Version 1.0
URL: <http://docs.oasis-open.org/cmisis/CMIS/v1.0/cmisis-spec-v1.0.html>
- [FOAF] The Friend of a Friend (FOAF) project. URL: <http://www.foaf-project.org/>
- [HCARD] hCard 1.0. URL: <http://microformats.org/wiki/hcard>
- [HOST-META] Hammer-Lahav, E., Cook, B., “Web Host Metadata”, Internet-Draft, Work In Progress
URL: <http://tools.ietf.org/html/draft-hammer-hostmeta-16>
- [MagicSig] Panzer, J., Laurie, B., and D. Balfanz, “[Magic Signatures.](#)”
URL: <http://salmon-protocol.googlecode.com/svn/trunk/draft-panzer-magicsig-01.html>
- [OAUTH] Oauth 2. URL: <http://oauth.net/2/>

[OEXCHANGE]	URL: http://www.oexchange.org/
[OExchange-Spec]	“OExchange Technical Specification” URL: http://www.oexchange.org/spec/
[OMA- Autho4API]	“Authorization Framework for Network APIs (1.0)”, Open Mobile Alliance™, URL: http://www.openmobilealliance.org/
[OMACAB]	“Converged Address Book”, Open Mobile Alliance™, OMA-ERP-CAB-V1_0, URL: http://www.openmobilealliance.org/
[OMACAB_APIs]	“Converged Address Book APIs”, Open Mobile Alliance™, OMA-WID_0215-CAB_APIs-V1_0, URL: http://www.openmobilealliance.org/
[OMACAB1.1]	“Converged Address Book v.1.1”, Open Mobile Alliance™, OMA-WID_0217-CAB-V1_1-20110301-A, URL: http://www.openmobilealliance.org/
[OMACMI]	“Content Management Interface”, Open Mobile Alliance™, OMA-ERP-CMI-V1_0, URL: http://www.openmobilealliance.org/
[OMACPM]	“Converged IP Messaging”, Open Mobile Alliance™, OMA-ERP-CPM-V1_0, URL: http://www.openmobilealliance.org/
[OMACSEA]	“Client-Side Enabler API”, Open Mobile Alliance™, OMA-RRP-CSEA-V1_0, URL: http://www.openmobilealliance.org/
[OMADCD]	“Dynamic Content Delivery”, Open Mobile Alliance™, OMA-ERP-DCD-V1_0, URL: http://www.openmobilealliance.org/
[OMADPE]	“Device Profiles Evolution”, Open Mobile Alliance™, OMA-ERP-DPE-V1_0, URL: http://www.openmobilealliance.org/
[OMAMSF]	“Mobile Search Framework”, Open Mobile Alliance™, OMA-ERP-MsrchFramework-V1_0, URL: http://www.openmobilealliance.org/
[OMANGSI]	“Next Generation Service Interfaces”, Open Mobile Alliance™, OMA-ERP-NGSI-V1_0, URL: http://www.openmobilealliance.org/
[OMANGSI-S]	“SOAP Binding for NGSI V1.0”, Open Mobile Alliance™, OMA-ERP-NGSI_S-V1_0, URL: http://www.openmobilealliance.org/
[OMAParlayREST2]	“RESTful bindings for Parlay X Web Services v.2.0”, Open Mobile Alliance™, OMA-ERP-ParlayREST-V2_0, URL: http://www.openmobilealliance.org/
[OMAPOC]	“Push to talk over Cellular”, Open Mobile Alliance™, OMA-ERP-PoC-V2_1, URL: http://www.openmobilealliance.org/
[OMA-Privacy]	“Privacy Requirements for Mobile Services”, Open Mobile Alliance™, OMA-RRP-Privacy-V1_0, URL: http://www.openmobilealliance.org/
[OMAPSA]	“Parlay Service Access”, Open Mobile Alliance™, OMA-RRP-PSA-V1_0, URL: http://www.openmobilealliance.org/
[OMAPUSH]	“Push Over The Air”, Open Mobile Alliance™, OMA-TS-PushOTA-V2_3, URL: http://www.openmobilealliance.org/
[OMARC_APIs]	“APIs for Rich Communications”, Open Mobile Alliance™, OMA-WID_0213-RCS_APIs-V1_0, URL: http://www.openmobilealliance.org/
[OMASCAB]	“CAB architecture simplification with new market requirements”, Open Mobile Alliance™, OMA-WID_0214-SimplifiedCAB-V1_0-20101221-A, URL: http://www.openmobilealliance.org/
[OMA-SIMPLE-IM]	“Instant Messaging”, Open Mobile Alliance™, OMA-ERP-SIMPLE_IM-V1_0, URL: http://www.openmobilealliance.org/
[OMASUPM]	“Service User Profile Management”, Open Mobile Alliance™, OMA-ERP-Service_User_Profile_Management-V1_0, URL: http://www.openmobilealliance.org/
[OMAWRAPI]	“Web Runtime API”, Open Mobile Alliance™, OMA-WID_0210-WRAPI-V1_0, URL: http://www.openmobilealliance.org/
[OMAXDM]	“XML Document Management”, Open Mobile Alliance™, OMA-ERP-XDM-V2_1,

	URL:http://www.openmobilealliance.org/
[ONESOCIALWEB]	URL: http://onesocialweb.org
[OPENID]	OpenID Foundation website. URL: http://openid.net/
[OPENID-AX]	OpenID Attribute Exchange 1.0 – Final. URL: http://openid.net/specs/openid-attribute-exchange-1_0.html
[OPENLIKE]	http://openlike.org/
[OPENSOCIAL]	OpenSocial. URL: http://www.opensocial.org/
[OSTATUS]	URL: http://ostatus.org/
[OStatus-Spec]	Prodromou, E., Vibber, B., Walker, J., Copley, Z., “OStatus 1.0 Draft 2” URL: http://ostatus.org/sites/default/files/ostatus-1.0-draft-2-specification.html
[POCO]	Portable Contacts. URL: http://portablecontacts.net/
[PuSH]	URL: http://pubsubhubbub.googlecode.com/svn/trunk/pubsubhubbub-core-0.3.html
[MSRP]	“The Message Session Relay Protocol (MSRP)”, B. Campbell et al, September 2007, URL: http://www.ietf.org/rfc/rfc4975.txt
[SALMON]	Salmon Protocol, http://www.salmon-protocol.org/
[Salmon-Protocol]	Panzer, J., “The Salmon Protocol” URL: http://salmon-protocol.googlecode.com/svn/trunk/draft-panzer-salmon-00.html
[SIMPLE]	SIP for Instant Messaging and Presence Leveraging Extensions (SIMPLE), http://datatracker.ietf.org/wg/simple/
[SIOC]	URL: http://sioc-project.org/
[SIP]	“SIP: Session Initiation Protocol”, J. Rosenberg et al, June 2002, URL: http://www.ietf.org/rfc/rfc3261.txt
[SWAT0]	http://www.w3.org/2005/Incubator/federatedsocialweb/wiki/SWAT0
[VCARD]	“vCard MIME Directory Profile”, http://www.ietf.org/rfc/rfc2426.txt
[W3C-FSW]	W3C Federated Social Web Incubator Group URL: http://www.w3.org/2005/Incubator/federatedsocialweb/
[WEBFINGER]	URL: http://webfinger.org
[WebFingerProtocol]	“WebFinger Protocol”, http://code.google.com/p/webfinger/wiki/WebFingerProtocol
[WEBID]	WebID 1.0. URL: http://payswarm.com/webid/
[XFN]	XHtml Friends Network. URL: http://gmpg.org/xfn/
[XMPP]	XMPP Standards Foundation. URL: http://xmpp.org/
[XRD]	Extensible Resource Descriptor (XRD) Version 1.0. URL: http://docs.oasis-open.org/xri/xrd/v1.0/xrd-1.0.html
[OMADICT]	“Dictionary for OMA Specifications”, Version 2.8., Open Mobile Alliance™, OMA-ORG-Dictionary-V2.8, URL:http://www.openmobilealliance.org/

3. Terminology and Conventions

3.1 Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in [Error! Reference source not found.].

All sections are normative, unless they are explicitly indicated to be informative.

3.2 Definitions

game player	The human being who is playing a game.
Connected (multiplayer) mobile game	A mobile game in which some of the User’s experience involves entities that are not resident on the User’s device; a Lottery is a connected mobile game, as is a game that admits high-score posting, or the downloading of ghost racers. (A mobile game in which multiple players simultaneously interact with one another through, or as a necessary part of, the game fiction)
Device	Equipment which is normally used by Users for communications and related activities, however also includes equipment where there is no User present, but the communications to and from the Device use the same communications channels as when used by Users. A Device can be seen as a network entity that is capable of sending and/or receiving information and has a unique device address. It can act as either a client or a server within a given context or across multiple contexts. For example, a device can service a number of Clients (as a Server) while being a Client to another Server.
Game Client	The portion of a mobile game (connected, multiplayer) that executes on the User’s device that is specifically concerned with interacting with the OMA Game Service. General reference to the game client excludes device-resident game fiction.
Game Service	The collection of end-to-end functionality provided that enables connected and/or multiplayer mobile games.
Game Service Provider	The business entity that provides the functionality of a Game Service to Users. A GSP may provide and manage all Game Service functionality itself, or make these available through business-to-business relationships.
Matchmaking	The process whereby a User indicates interest in participating in a multiplayer mobile application (multiplayer game), possibly specifying criteria that the other participants must meet. The result is either a game session in which the User has been placed, or an indication that it is not possible to meet the specified criteria.
Mobile application (game)	An application that executes on a mobile device. (A mobile application that is a game)
Service Provider	An entity that provides and administers Service to a Subscriber and / or User. The Service Provider may or may not be the provider of the network and content
Turn-based Game	A game in which, at each point in time, only a subset of players are allowed to make a move that alters the game’s shared state.

3.3 Abbreviations

API	Application Programming Interface
JSON	JavaScript Object Notation
MSISDN	Mobile Subscriber ISDN Number
MSN	Mobile Social Network
NNI	Network to Network Interface
OMA	Open Mobile Alliance
RCS	Rich Communication Suite

RDF	Resource Description Framework
RSS	Really Simple Syndication
SDO	Standards Development Organization
SMTP	Simple Mail Transfer Protocol
SN	Social Network
SNS	Social Network Service
SSL	Secure Sockets Layer
TLS	Transport Layer Security
UNI	User to Network Interface
URI	Uniform Resource Identifier
URL	Uniform Resource Locator
XML	Extensible Markup Language
XMPP	Extensible Messaging and Presence Protocol

4. Introduction

(Informative)

This Architecture Document defines the architecture of GSAPI (Game Service API) Enabler based on the GSAPI requirements defined in [GSAPI-RD].

This Architecture Document will define the functional interfaces between the Game Service Server and Game client and Game Developer.

This document will also describe and define the following functions and capabilities:

- Functions of Game Server
- Functions of Game Client
- Functions of Game Developer
- Interactivity between Game client and Game Server.
- Interactivity between Game client and Game Content
- Interactivity between Game Developer and Game Server
- Interactivity between Game Server and External Billing Server
- Getting data by GS API
- Statistics collection and reporting of data and service usage
- Security related function

4.1 Version 1.0

The Architecture Document of GSAPI Enabler 1.0 addresses the requirements targeted for this release that are solved by architecture design.

However, this release of the AD does not address the requirements that were deferred for future releases, such as requirements on peer-to-peer implementation, charging third parties for delivering the information to them and etc.

5. Architectural Model

The architecture model is based on the requirements defined in [GSAPI-RD].

5.1 Dependencies

The GS API Enabler technical specifications are dependent on the following technologies:

- The HTTP 1.1 [RFC2616] as the default mandatory protocol for interfaces.

5.2 Architectural Diagram

Figure 1 shows the architectural diagram of OMA GSAPI.

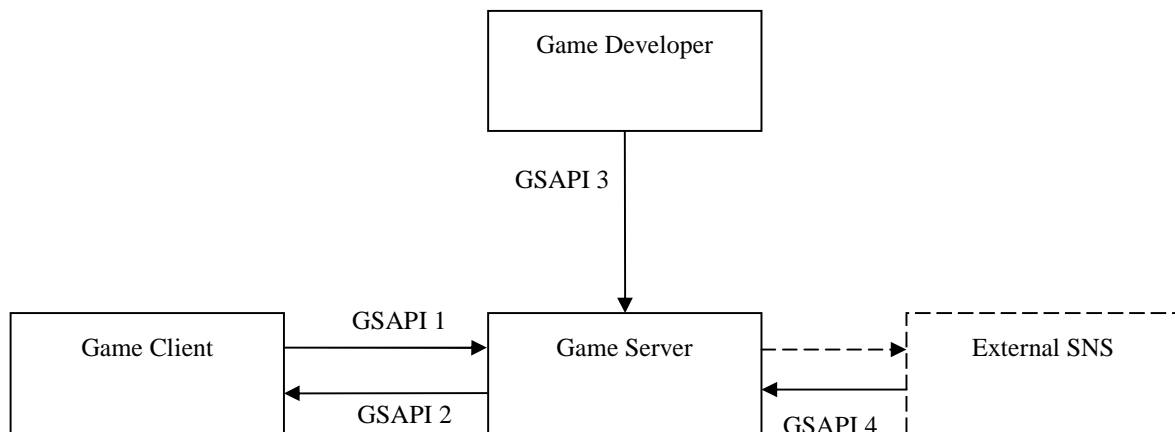


Figure 1 Main Architecture of GSAPI 1.0

5.2.1 Architecture principle

GSAPI architecture consists of logical entities (i.e., Game Client, Game and Game Server). From the architectural perspective, the physical deployments are not restricted as far as capability of physical devices allow.

5.3 Functional Components and Interfaces definition

5.3.1 Functional Components

This section describes the OMA GSAPI functional components.

5.3.1.1 Game Server

The Game Server is a GSAPI Enabler component that resides in the core network performs the following functions:

- GSAPI data delivery function
- Usage Statistics Collection & Reporting
- Handling game SNS data.
- Game Player / service data management function
- Connection between game users to enable match-making service.
- Delivering billing data to billing server(optional)
- Notify some messages to the Game Client

5.3.1.2 Game Client

The Game Client is enabler to deliver and aquisition game data from/to Game Server

- Game SNS data delivery and getting notification.
- Management for data(buddies, messages, game comments)
- Delivering game data to other game users' game client.

5.3.1.3 Game Developer

Game Developer is the provider of Game and Game items to Game Players

- Game item provider.
- Game Application provider

5.3.1.4 External SNS

The External SNS is the external SNS Service.

- Game server can send game comment or other game data to this entity.
- External SNS can get game data like game comment, game information by GSAPI.

5.3.2 Functional Interfaces

This section describes the OMA GSAPI functional interfaces.

5.3.2.1 GSAPI-1

This interface is for gathering game data from game server by using API.

This interface send or get the data by using proper authentication way.

- Game player registration and login
- Getting game ranking and score
- Adding Buddy to user's buddy list
- Getting game users' buddy list
- Getting buddy's game list

- Getting game comments
- Getting counter game player for match-making
- Getting item list which is bought by the game user
- Getting item list for selling
- Getting message data from other game users
- Sending Game comment to the Game Server
- Sending message to the Game Server.
- Sending request for the match making
- Sending request for buying some game items.
- Security

5.3.2.2 GSAPI-2

This interface is for push notification for match making or for other messages.

- delivering push notification to the game player for the match making
- delivering message notification
- Security

5.3.2.3 GSAPI-3

This interface is for registering games and game items by game developer.

- Sending game information to the game server
- Sending game item information to the game server
- Getting billing statistics.
- Security

5.3.2.4 GSAPI-4

This interface enable to the external service to getting GSAPI data by using API. External SNS can get data in GSAPI by authentication key like token.

- Getting game information, game comment, game item information
- Security

5.4 Security Considerations

The security considerations described in this section apply to any GSAPI Enabler implementation, and these considerations may result in different deployment models. Any particular security mechanism that proves to be intrinsic to the GSAPI Enabler specification will be addressed in the GSAPI Technical Specifications.

The Service Provider deploying the GSAPI Enabler implementation needs to ensure that all entities requiring access to information provided via the interfaces exposed by the functional components of the GSAPI Enabler are subject to the following security considerations:

- Authentication/authorization of Game Users.
- Protection of data integrity and confidentiality
- Security-key (i.e. Entity User Key and Group Key) management
- Secure content/service sharing inside Service Groups by Group Key

5.5 Charging Considerations

GSAPI contains item purchasing function which should be considered by charging enablers.

Game users can buy some game items for enjoying game and those game items can be various figure. it is kind of character design, game playing time ticket , etc.

Appendix A. Change History (Informative)

A.1 Approved Version History

Reference	Date	Description
n/a	n/a	No prior version –or- No previous version within OMA

A.2 Draft/Candidate Version 1.0 History

Document Identifier	Date	Sections	Description
Draft version: OMA-AD-GSAPI-V1_0	17 Feb 2012	All	Draft version
Candidate version: OMA-AD-GSAPI-V1_0	24 Apr 2012	All	Status changed to Candidate by TP: OMA-TP-2012-0176- INP_GS_API_V1_0_RRP_for_Candidate_Approval

Appendix B. Flows

(Informative)

B.1 Basic Work flow GSAPI-1

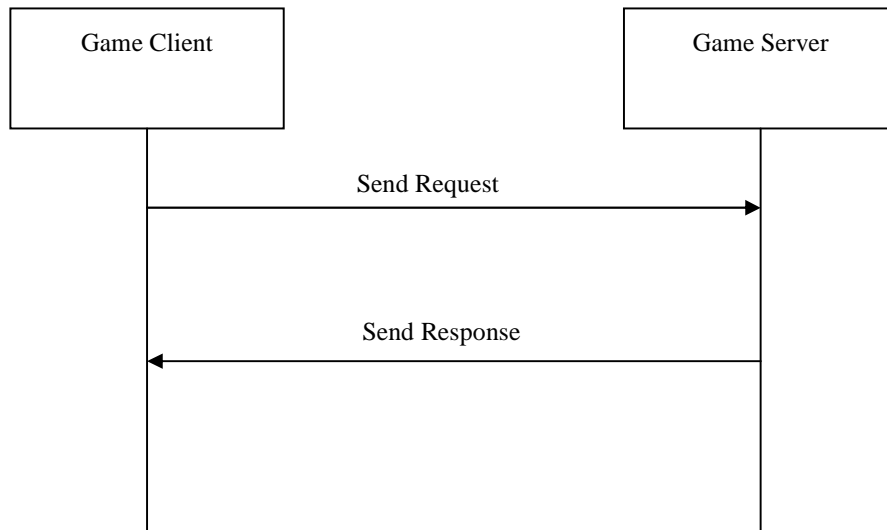


Figure 2: GSAPI-1 Work flow

Game user wants to getting some data, then the game client send the request to the server.

For example, If Game player wants to see the game ranking, the game client send request to the game server and the game server retrieve result data to the game client.

The game player can see the ranking list.

B.2 Basic Work flow GSAPI-2

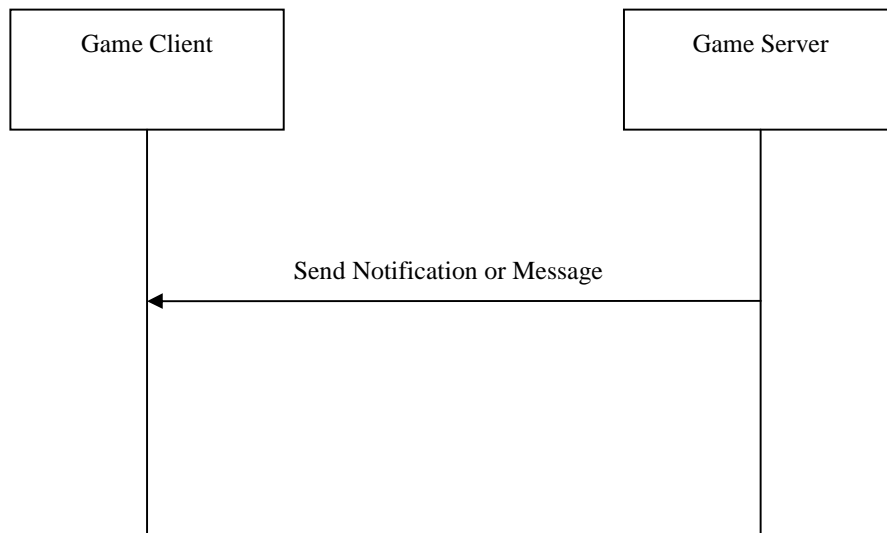


Figure 3: GSAPI-2 Work flow

When a game player sends request match making to the server, the server find proper game player in login and send push notification to play a game with other game player.

B.3 Basic Work flow GSAPI-3

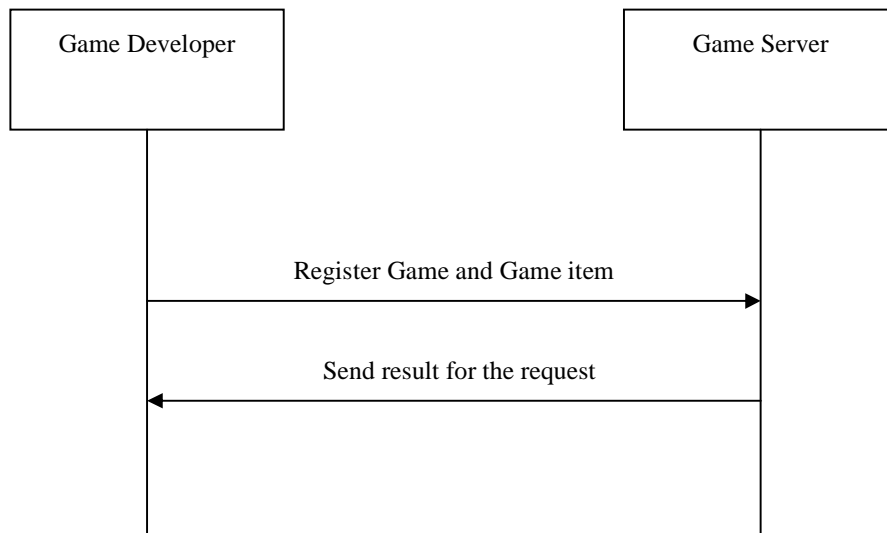


Figure 4: GSAPI-3 Work flow

Game developer requests to register his/her game information.

Game developer request to register his/her game item.

Game server save the game and game item information and send result of the request

B.4 Basic Work flow GSAPI-4

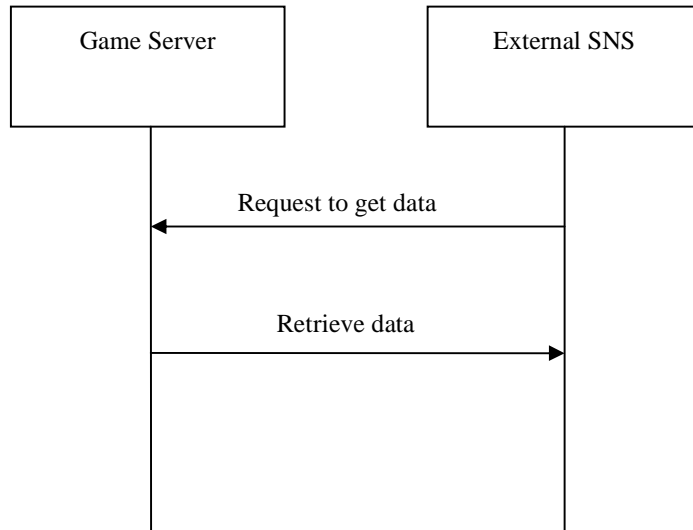


Figure 5: GSAPI-4 Work flow

External SNS requests to get game data like game comment, game information, game item information with proper authentication like token.

Game server send the data to the External SNS.