



# **Lock and Wipe Management Object**

## **Candidate Version 1.0 – 28 Jul 2009**

---

**Open Mobile Alliance**  
**OMA-TS-LAWMO-V1\_0-20090728-C**

Use of this document is subject to all of the terms and conditions of the Use Agreement located at <http://www.openmobilealliance.org/UseAgreement.html>.

Unless this document is clearly designated as an approved specification, this document is a work in process, is not an approved Open Mobile Alliance™ specification, and is subject to revision or removal without notice.

You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. You may not use this document in any other manner without the prior written permission of the Open Mobile Alliance. The Open Mobile Alliance authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services. The Open Mobile Alliance assumes no responsibility for errors or omissions in this document.

Each Open Mobile Alliance member has agreed to use reasonable endeavors to inform the Open Mobile Alliance in a timely manner of Essential IPR as it becomes aware that the Essential IPR is related to the prepared or published specification. However, the members do not have an obligation to conduct IPR searches. The declared Essential IPR is publicly available to members and non-members of the Open Mobile Alliance and may be found on the “OMA IPR Declarations” list at <http://www.openmobilealliance.org/ipr.html>. The Open Mobile Alliance has not conducted an independent IPR review of this document and the information contained herein, and makes no representations or warranties regarding third party IPR, including without limitation patents, copyrights or trade secret rights. This document may contain inventions for which you must obtain licenses from third parties before making, using or selling the inventions. Defined terms above are set forth in the schedule to the Open Mobile Alliance Application Form.

NO REPRESENTATIONS OR WARRANTIES (WHETHER EXPRESS OR IMPLIED) ARE MADE BY THE OPEN MOBILE ALLIANCE OR ANY OPEN MOBILE ALLIANCE MEMBER OR ITS AFFILIATES REGARDING ANY OF THE IPR'S REPRESENTED ON THE “OMA IPR DECLARATIONS” LIST, INCLUDING, BUT NOT LIMITED TO THE ACCURACY, COMPLETENESS, VALIDITY OR RELEVANCE OF THE INFORMATION OR WHETHER OR NOT SUCH RIGHTS ARE ESSENTIAL OR NON-ESSENTIAL.

THE OPEN MOBILE ALLIANCE IS NOT LIABLE FOR AND HEREBY DISCLAIMS ANY DIRECT, INDIRECT, PUNITIVE, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF DOCUMENTS AND THE INFORMATION CONTAINED IN THE DOCUMENTS.

© 2009 Open Mobile Alliance Ltd. All Rights Reserved.

Used with the permission of the Open Mobile Alliance Ltd. under the terms set forth above.

# Contents

- 1. SCOPE.....4
- 2. REFERENCES .....5
  - 2.1 NORMATIVE REFERENCES .....5
  - 2.2 INFORMATIVE REFERENCES .....5
- 3. TERMINOLOGY AND CONVENTIONS.....6
  - 3.1 CONVENTIONS .....6
  - 3.2 DEFINITIONS.....6
  - 3.3 ABBREVIATIONS .....6
- 4. INTRODUCTION .....7
  - 4.1 VERSION 1.0 .....7
- 5. LOCK AND WIPE MANAGEMENT OBJECT .....8
  - 5.1 FIGURE OF THE MANAGEMENT OBJECT (INFORMATIVE) .....8
  - 5.2 LOCK AND WIPE MANAGEMENT OBJECT PARAMETERS .....8
- 6. BEHAVIOR ASSOCIATED WITH THE MANAGEMENT OBJECT .....11
  - 6.1 EXEC COMMAND SEMANTICS.....11
  - 6.2 SYNCHRONOUS RESULT REPORTING .....12
  - 6.3 ASYNCHRONOUS RESULT REPORTING USING GENERIC ALERT .....12
  - 6.4 LAWMO RESULT CODE .....13
  - 6.5 ALERT TYPES FOR LAWMO.....14
  - 6.6 USER INTERACTION COMMANDS.....14
    - 6.6.1 Requesting User Confirmation.....14
- APPENDIX A. CHANGE HISTORY (INFORMATIVE).....15
  - A.1 APPROVED VERSION HISTORY .....15
  - A.2 DRAFT/CANDIDATE VERSION 1.0 HISTORY .....15
- APPENDIX B. STATIC CONFORMANCE REQUIREMENTS (NORMATIVE).....16
  - B.1 SCR FOR LAWMO TREE STRUCTURE.....16
  - B.2 SCR FOR LAWMO CLIENT .....16
  - B.3 SCR FOR LAWMO SERVER.....17

# Figures

- Figure 1: Lock and Wipe Management Object.....8

# 1. Scope

This document defines the Lock and Wipe Management Object employed in a Lock and Wipe management process that leverages OMA DM protocol [DMPRO]. It also defines LAWMO Client and LAWMO Server-side behaviour associated with Lock and Wipe Management Object necessary to remotely manage the Device.

The mechanisms defined in this document fulfils the functional requirements needed to support LAWMO enabler as described in the LAWMO requirements document [LAWMO-RD] and comply to the architecture defined in LAWMO Architecture document [LAWMO-AD].

## 2. References

### 2.1 Normative References

- [DMPRO] “OMA Device Management Protocol”, Version 1.2, Open Mobile Alliance, OMA-TS-DM\_Protocol-V1\_2,  
URL: <http://www.openmobilealliance.org/>
- [DMREPRO] “OMA DM Representation Protocol”, Version 1.2, Open Mobile Alliance, OMA-TS-DM\_RepPro-V1\_2,  
URL: <http://www.openmobilealliance.org/>
- [LAWMO-AD] “LAWMO Architecture”, Version 1.0, Open Mobile Alliance, OMA-AD\_LAWMO-V1\_0,  
URL: <http://www.openmobilealliance.org/>
- [LAWMO-RD] “LAWMO Requirements”, Version 1.0, Open Mobile Alliance, OMA-RD\_LAWMO-V1\_0,  
URL: <http://www.openmobilealliance.org/>
- [RFC2119] “Key words for use in RFCs to Indicate Requirement Levels”, S. Bradner, March 1997,  
URL: <http://www.ietf.org/rfc/rfc2119.txt>
- [RFC4234] “Augmented BNF for Syntax Specifications: ABNF”. D. Crocker, Ed., P. Overell. October 2005,  
URL: <http://www.ietf.org/rfc/rfc4234.txt>
- [SCRRULES] “SCR Rules and Procedures”, Open Mobile Alliance™, OMA-ORG-SCR\_Rules\_and\_Procedures,  
URL: <http://www.openmobilealliance.org/>

### 2.2 Informative References

- [OMADICT] “Dictionary for OMA Specifications”, Version 2.7, Open Mobile Alliance™,  
OMA-ORG-Dictionary-V2\_7, URL:<http://www.openmobilealliance.org/>

## 3. Terminology and Conventions

### 3.1 Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in [RFC2119].

All sections and appendixes, except “Scope” and “Introduction”, are normative, unless they are explicitly indicated to be informative.

### 3.2 Definitions

|                              |   |
|------------------------------|---|
| <b>Device</b>                | see [OMADICT]   |
| <b>Factory Reset</b>         | The act to reset the device to its initial factory state.   |
| <b>Fully Lock Device</b>     | To render the device fully inoperable from unauthorised usage except for functions mandated by law (e.g. emergency calls) and participating LAWMO sessions as well as other data sessions that aid in the recovery of the device.                         |
| <b>LAWMO Alert</b>           | LAWMO-specific alerts which convey the result of LAWMO Operations via the DM Generic Alert mechanism [DMPRO].   |
| <b>LAWMO Operations</b>      | Lock Device, Unlock Device, Wipe Device’s Data and Factory Reset operations which may be invoked on a Lock and Wipe MO.   |
| <b>Lock Device</b>           | To render the device fully or partially inoperable from unauthorised usage according to which lock level is chosen.<br><br>Two lock levels are defined: Partially Lock Device and Fully Lock Device.  |
| <b>Management Object</b>     | A data model for information which is a logical part of the interfaces exposed by DM components.  |
| <b>Partially Lock Device</b> | To render the device inoperable from unauthorised usage except for receiving incoming calls, functions mandated by law (e.g. emergency calls), and participating in LAWMO sessions as well as other data sessions that aid in the recovery of the device. |
| <b>Unlock Device</b>         | To re-enable all Device functionalities previously locked by Lock Device operation.   |
| <b>Wipe Device’s Data</b>    | The act to permanently erase personal and/or enterprise-related data from the device.   |

### 3.3 Abbreviations

|              |                                 |
|--------------|---------------------------------|
| <b>DM</b>    | Device Management               |
| <b>DMS</b>   | Device Management Server        |
| <b>LAWMO</b> | Lock And Wipe Management Object |
| <b>MO</b>    | Management Object               |
| <b>MOI</b>   | Management Object Identifier    |
| <b>OMA</b>   | Open Mobile Alliance            |

## 4. Introduction

The mobile device is becoming a pocketable private information database which contains various user data and enterprise-related data. There are several scenarios where a user may need to remotely lock and/or wipe the device as follows:

- If the device was lost or stolen, there is a risk of data being compromised either maliciously or by accident. A User may request to lock the device and/or wipe sensitive data from the device. If the device is returned, the user can also request to unlock the device.
- If the device was given or sold to another user, the owner may request to erase all sensitive data in the device or reset it to factory state.

There are more use cases and scenarios that may require LAWMO Operations, such as Lock/Unlock Device, Wipe Device's Data and Factory Reset.

This specification defines the Lock and Wipe Management Object and associated LAWMO Client and LAWMO Server-side behaviour for LAWMO Operations.

This specification is expected to meet all the requirements defined in [LAWMO-RD] and to comply with [LAWMO-AD].

### 4.1 Version 1.0

The OMA LAWMO Enabler v1.0 supports the following functionality:

- Lock the Device – partially or fully.
- Unlock the Device
- Wipe the data from the Device – personal or/and enterprise.
- List the available data that can be wiped from the Device.
- Configure the data to be wiped from the Device.
- Trigger remotely a Factory Reset of the Device.
- Report the result of LAWMO Operations to LAWMO Server
- Notify the user with the LAWMO Operation result when LAWMO Operation is executed

## 5. Lock and Wipe Management Object

### 5.1 Figure of the Management Object (Informative)

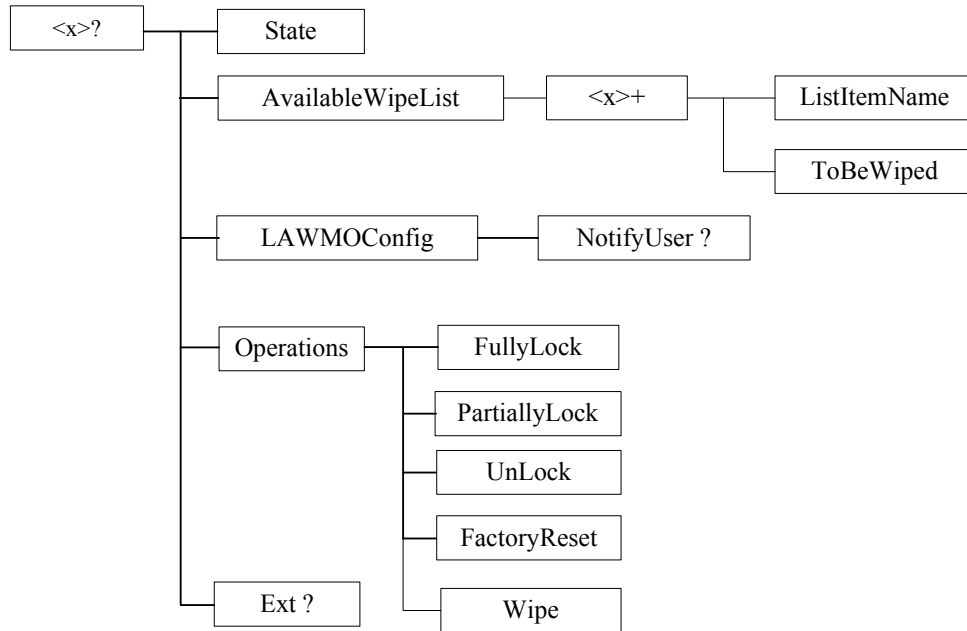


Figure 1: Lock and Wipe Management Object

### 5.2 Lock and Wipe Management Object Parameters

Lock and Wipe Management Object consists of following parameters:

<x>

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | ZeroOrOne  | node   | Get               |

This interior node groups together the parameters of a LAWMO. The ancestor elements of this node define the position in the DM tree of this MO.

The type of this node MUST be the LAWMO MOI 'urn:oma:mo:oma-lawmo:1.0'.

<x>/ State

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | int    | Get               |

This leaf node specifies the state for the Device. The value of this node is one of the following:

| <u>Integer Value</u> | <u>State</u>     | <u>Description</u>                       |
|----------------------|------------------|--|
| 10                   | Fully Locked     | The device is in Fully Locked state.     |
| 20                   | Partially Locked | The device is in Partially Locked state. |
| 30                   | Unlocked         | The device is in Unlocked state.         |



**<x>/AvailableWipeList**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | node   | Get               |

This node is the placeholder for the lists of data that can be wiped from the Device and also contains the configuration for which data will be wiped from the Device. The LAWMO Server can get the list to determine what data are available on the Device. It can also set the configuration that which data will be wiped from the Device when Wipe Operation is executed.

**<x>/ AvailableWipeList/<x>**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Optional | OneOrMore  | node   | Get               |

This node is the placeholder for a list item.

**<x>/ AvailableWipeList/<x>/ListItemName**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | chr    | Get               |

This node specifies a specific category of data that can be wiped from the Device.

**<x>/ AvailableWipeList/<x>/ToBeWiped**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | bool   | Get, Replace      |

This node specifies whether the specific category of data will be wiped when Wipe Operation is executed. If the value is “true”, the data will be wiped when Wipe Operation is executed. If the value is “false”, the data will not be wiped when Wipe Operation is executed.

**<x>/LAWMOConfig**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | node   | Get               |

This interior node groups together the configuration parameters for the LAWMO.

**<x>/LAWMOConfig/NotifyUser**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Optional | ZeroOrOne  | bool   | Get, Replace      |

This leaf node specifies whether the user is notified with the LAWMO Operation result when FullyLock/PartiallyLock/Unlock/Wipe/FactoryReset Primitive is executed. If the node is not present or the value is ‘false’, the user SHALL NOT be notified about the result of the operation. If the node is present and the value is ‘true’, the user SHALL be notified about the result of the operation.

**<x>/Operations**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | node   | Get               |

This node is a parent node for Operations that can be executed for LAWMO in the device.

**<x>/Operations/FullyLock**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | null   | Exec              |

This node is used with Exec command to Fully Lock the device.

**<x>/Operations/PartiallyLock**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | null   | Exec              |

This node is used with Exec command to Partially Lock the device.

**<x>/Operations/UnLock**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | null   | Exec              |

This node is used with Exec command to re-enable all device functionalities previously locked by Lock Device operation.

**<x>/Operations/FactoryReset**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Required | One        | null   | Exec              |

This node is used with Exec command to reset the device to its initial factory state.

**<x>/Operations/Wipe**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Optional | One        | null   | Get, Exec         |

This node is used with Exec command to permanently erase data from the device. For those data whose "ToBeWiped" value is "true" will be wiped from the Device when Wipe Operation is executed.

**<x>/Ext**

| Status   | Occurrence | Format | Min. Access Types |
|----------|------------|--------|-------------------|
| Optional | ZeroOrOne  | node   | Get               |

This node designates a branch of the <x> sub-tree into which vendor extensions MAY be added, permanently or dynamically. Ext sub tree provides flexible points of extension for vendor-specific parameters. However, vendor extensions MUST NOT be defined outside of Ext sub-tree.

## 6. Behavior associated with the Management Object

### 6.1 Exec command semantics

In the LAWMO tree the Exec command is only allowed to target Primitives under Operations nodes. After an Exec command to one of the Primitives under Operations node, the LAWMO Client MUST send response to the LAWMO Server in either of the following ways:

1. Asynchronously if the Exec command is acceptable and will be executed asynchronously.
  - The LAWMO Client MUST return status code 202 (“Accepted for processing”) for Exec command, as defined in [DMREPRO]
  - Upon completion of the asynchronous operation, the LAWMO Client MUST send an alert back to the server by using the Generic Alert defined in [DMPRO].
2. Synchronously If the Exec command is acceptable and executed synchronously.
  - If the Exec command is performed, the LAWMO Client MUST return appropriate LAWMO Result Code in <Status>/<Data> element for Exec command as defined in section 6.4.

Before receiving the Exec command, the following Pre-Condition needs to be satisfied:

- At least the following nodes need to be set with an appropriate value:
  - <X>/Operations/... (at least one Operation sub-node for the Primitive to be executed)

The Exec command targeting a child node of an Operations node starts the execution of a chosen Primitive. For example:

```
<Exec>
  <CmdID>3</CmdID>
  <Item>
    <Target>
      <LocURI>./LW/Operations/FullyLock</LocURI>
    </Target>
  </Item>
</Exec>
```

If the Exec command is targeting FullyLock/PartiallyLock Primitive, the LAWMO Client MUST Fully/Partially Lock the device.

If the Exec command is targeting Unlock Primitive, the LAWMO Client MUST re-enable all device functionalities previously locked by Lock or PartiallyLock Operations.

If the Exec command is targeting Factory Reset Primitive, the LAWMO Client MUST reset the device to its initial factory state. In this case only the status code for Exec command will be returned to LAWMO Server within the same DM session. It is not possible to report result back.

There are two purposes for the <x>/AvailableWipeList branch:

- The LAWMO Client uses it to expose the list of data supported on the Device to LAWMO Server and receive configuration from LAWMO Server at the same time. In this case, the LAWMO Client MUST create the <x> and its child nodes under <x>/AvailableWipeList node for each supported list in advance. Then the LAWMO Server can

obtain the list using <Get> command and set the value of "ToBeWiped" node to specify whether a specific list will be removed when Wipe Primitive is executed.

- The LAWMO Server uses it to configure the list of data supported on the Device to LAWMO Server only. In this case, the LAWMO Server MUST create the <x> and its child nodes under <x>/AvailableWipeList node for each list and set the value of "ToBeWiped" node to specify whether a specific list will be removed when Wipe Primitive is executed.

When the Wipe primitive is executed, all data associated with nodes in the "AvailableWipeList" that have "ToBeWiped" nodes with values of "true" MUST be wiped. After the Wipe primitive is executed, nodes in the "AvailableWipeList" subtree MAY be removed by the LAWMO Client. For example, if the server is wiping SMS messages in SMS Inbox, the <x> node may remain in place to allow future invocations. If the server is wiping a transient data, the <x> node MAY be removed by the LAWMO Client after the data is wiped.

## 6.2 Synchronous Result Reporting

If the Exec command is executed synchronously, the LAWMO Client MUST send result for Exec command as described below:

- The <Data> element MUST contain a valid LAWMO Result Code defined in section 6.4
- The URI of the Primitive node on which the Exec command was invoked – Used to identify the source MUST be included in the <Source>/<LocURI> of <Status>/<Item> element.

The following is the example message:

```
<Status>
  <MsgRef>1</MsgRef>
  <CmdRef>2</CmdRef>
  <Cmd>Exec</Cmd>
  <Data>1200</Data>    <!--LAWMO Result status Code -->
  <Item>
    <Source>
      <LocURI>./LAWMO/Operations/Lock</LocURI>
    </Source>
  </Item>
</Status>
```

## 6.3 Asynchronous Result Reporting Using Generic Alert

If the Exec command is executed asynchronously, the LAWMO Client MUST send a LAWMO Alert to the LAWMO Server about the result of the operation via a Generic Alert message [DMPRO]. The alert message includes the following data:

- The URI of the Primitive node on which the Exec command was invoked MUST be included in the <Source>/<LocURI> element
- An integer Result Code – Used to report result of the operation. The appropriate LAWMO Result Code defined in section 6.4 MUST be included in an Item/Data element.
- The alert type MUST be included in <Meta>/<Type> element.

LAWMO Alerts that are reporting an error or failure condition SHOULD report an importance level defined in [DMPRO] higher than Informational in the Mark field of the Meta information. The following is the example message:

```
<Alert>
  <CmdID>2</CmdID>
  <Data>1226</Data>    <!-- Alert Code for Generic Alert -->
```

```

<Item>
  <Source>
    <LocURI>./LAWMO/Operations/FullyLock</LocURI>
  </Source>
  <Meta>
    <Type xmlns="syncml:metinf"> urn:oma:at:lawmo:1.0:OperationComplete</Type>
    <Format xmlns="syncml:metinf">text/plain</Format>
    <Mark xmlns="syncml:metinf">warning</Mark>
  </Meta>
  <Data>1401</Data>  <!-- LAWMO Result Code -->
</Item>
</Alert>

```

## 6.4 LAWMO Result Code

The LAWMO Result Code MUST be sent as an integer value in <Item>/<Data> element of the LAWMO Alert message or in response to an Exec command in case of synchronous execution. The Result Code MUST be one of the values defined below:

| Result Code | Result Message  | Informative Description of Status Code Usage  |
|-------------|---|---|
| 1200        | Operation Succeeded   | Operation is completed successfully   |
| 1201        | Wipe Operation Succeeded with data wiped  | Wipe Operation Succeeded. Only data was wiped   |
| 1202        | Wipe Operation Succeeded with both data and associated wipe list within management tree wiped | Wipe Operation Succeeded. Data and associated wipe list within management tree was wiped together                                 |
| 1250-1299   | Successful – Vendor Specified   | Successful Operation with Vendor Specified Result Code  |
| 1400        | Client Error  | Client error – based on User or Device behaviour  |
| 1401        | User cancelled  | User chose not to accept the operation when prompted  |
| 1402        | Fully Lock Device Failed  | The Fully Lock Device Operation failed  |
| 1403        | Partially Lock Device Failed  | The Partially Lock Device Operation failed  |
| 1404        | UnLock Device Failed  | The UnLock Device Operation failed  |
| 1405        | Wipe Device’s Data Failed   | The Wipe Device’s Data Operation failed   |
| 1406        | Wipe Operation not performed  | The Wipe Operation was not performed due to all the value of “ToBeWiped” nodes are set with “False” under the “AvailableWipeList” |
| 1450-1499   | Client Error – Vendor Specific  | Client Error encountered for Operation with Vendor Specified Result Code  |

## 6.5 Alert Types for LAWMO

The following alert types **MUST** be used in a Generic Alert [DMPRO] message originating from a Lock and Wipe Management Object. The alert type is used to identify the operation that was performed on the Device.

- “urn:oma:at:lawmo:1.0:OperationComplete”: This alert type is used to claim that the alert message conveys the result of LAWMO Operation(s) that was performed on the device.

## 6.6 User Interaction Commands

This section deals with the LAWMO Client behavior associated with user interactions commands sent to the Device.

### 6.6.1 Requesting User Confirmation

The LAWMO Server **MAY** request user confirmation before performing LAWMO operations within the Device. However it is important to ensure that the LAWMO Client supports the ability to handle the user confirmation request.

In particular the LAWMO Client:

- **SHOULD** support DISPLAY Alert as described in [DMPRO].
- **SHOULD** support CONFIRM OR REJECT Alert as described in [DMPRO].
- **SHOULD** support USER INPUT Alert as described in [DMPRO].
- **SHOULD** support USER CHOICE Alert as described in [DMPRO].

The LAWMO Server **SHOULD** support all these Alerts.

## Appendix A. Change History

(Informative)

### A.1 Approved Version History

| Reference | Date | Description      |
|-----------|------|------------------|
| n/a       | n/a  | No prior version |

### A.2 Draft/Candidate Version 1.0 History

| Document Identifier                     | Date                                    | Sections                              | Description  |
|---|---|---------------------------------------|--|
| Draft Versions<br>OMA-TS-LAWMO-V1_0     | 28 Mar 2008                             | All                                   | Incorporates agreed CR:<br>OMA-DM-LAWMO-2007-0026R02   |
|   | 08 May 2008                             | 5                                     | Incorporates agreed CR:<br>OMA-DM-LAWMO-2008-0005R02   |
|   | 01 Jun 2008                             | 5<br>Appendix B                       | Incorporates agreed CRS:<br>OMA-DM-LAWMO-2008-0010<br>OMA-DM-LAWMO-2008-0009R02                              |
|   | 08 Jul 2008                             | 5.1,5.2                               | Incorporates agreed CR:<br>OMA-DM-LAWMO-2008-0010R01   |
|   | 14 Oct 2008                             | 2.1,6.1<br>6.2,6.3,6.4,6.<br>5<br>6.6 | Incorporates agreed CRs:<br>OMA-DM-LAWMO-2008-0018R03<br>OMA-DM-LAWMO-2008-0019R01<br>OMA-DM-LAWMO-2008-0020 |
|   | 15 Oct 2008                             | All                                   | Editorial clean up   |
|   | 22 Oct 2008                             | 4.1                                   | Incorporates agreed CR:<br>OMA-DM-LAWMO-2008-0024R02   |
|   | 11 Nov 2008                             | 5.2,6.3,6.4,6.<br>5                   | Incorporates agreed CR:<br>OMA-DM-LAWMO-2008-0025  |
|   | 12 Jan 2009                             | 5.2                                   | Incorporated agreed CR:<br>OMA-DM-LAWMO-2009-0001  |
|   | Candidate Versions<br>OMA-TS-LAWMO-V1_0 | 27 Jan 2009                           | n/a  |
| Draft Versions<br>OMA-TS-LAWMO-V1_0     | 25 Feb 2009                             | 6.5                                   | Incorporated agreed CR:<br>OMA-DM-LAWMO-2009-0003  |
|   | 09 Mar 2009                             | 6.1<br>6.4                            | Incorporated agreed CR:<br>OMA-DM-LAWMO-2009-0005  |
|   | 11 Mar 2009                             | 6.4                                   | Incorporated agreed CR:<br>OMA-DM-LAWMO-2009-0006R02   |
| Candidate Versions<br>OMA-TS-LAWMO-V1_0 | 17 Mar 2009                             | n/a                                   | Status changed by TP<br>TP ref# OMA-TP-2009-0118-<br>INP_LAWMO_V1_0_ERP_for_notification                     |
| Draft Versions<br>OMA-TS-LAWMO-V1_0     | 03 Jul 2009                             | 5.2<br>6.1<br>6.2                     | Incorporated CRs<br>OMA-DM-LAWMO-2009-0008-CR_NotifyUser_Bugfix<br>OMA-DM-LAWMO-2009-0007R01-CR_TS_Bug_Fixes |
| Candidate Versions<br>OMA-TS-LAWMO-V1_0 | 09 Jul 2009                             | n/a                                   | Status changed by TP<br>TP Ref# OMA-TP-2009-0314R01-<br>INP_LAWMO_V1_0_ERP_for_Candidate_Re_Approval.ZIP     |

## Appendix B. Static Conformance Requirements (Normative)

The notation used in this appendix is specified in [SCRRULES].

### B.1 SCR for LAWMO Tree Structure

| Item          | Function  | Reference   | Requirement |
|---------------|---|-------------|-------------|
| LAWMO-T-001-M | Use of appropriate Management Object identifier for the LAWMO node                  | Section 5.2 |             |
| LAWMO-T-002-M | Support for Required nodes under root node  | Section 5.2 |             |
| LAWMO-T-003-O | Support for Optional nodes  | Section 5.2 |             |
| LAWMO-T-004-M | Support for Required nodes under an Optional node if the Optional node is supported | Section 5.2 |             |

### B.2 SCR for LAWMO Client

| Item          | Function  | Reference   | Requirement |
|---------------|---|-------------|-------------|
| LAWMO-C-001-M | Support for FullyLock Operation   | Section 6.1 |             |
| LAWMO-C-002-M | Support for PartiallyLock Operation   | Section 6.1 |             |
| LAWMO-C-003-M | Support for UnLock Operation  | Section 6.1 |             |
| LAWMO-C-004-M | Support for FactoryReset Operation  | Section 6.1 |             |
| LAWMO-C-005-O | Support for Wipe Operation  | Section 6.1 |             |
| LAWMO-C-006-M | Support for listing available data which can be wiped   | Section 6.1 |             |
| LAWMO-C-007-M | Support for creation of <x>/AvailableWipeList/<x> and sub-nodes to list the available data which can be wiped from the Device | Section 6.1 |             |
| LAWMO-C-008-M | Support for modification of the list of data to be wiped  | Section 6.1 |             |
| LAWMO-C-009-M | Support for modification of <x>/AvailableWipeList/<x>/ListItemName  | Section 6.1 |             |
| LAWMO-C-010-M | Support for modification of <x>/AvailableWipeList/<x>/ToBeWiped   | Section 6.1 |             |



### B.3 SCR for LAWMO Server

| Item          | Function  | Reference   | Requirement |
|---------------|---|-------------|-------------|
| LAWMO-S-001-M | Support for the Lock and Wipe Management Object   | Section 6.1 |             |
| LAWMO-S-002-M | Support for obtain the list of the data to be wiped from the Device                                   | Section 6.1 |             |
| LAWMO-S-003-M | Support for modification on <x>/AvailableWipeList to specify which data will be wiped from the Device | Section 6.1 |             |